**GOSLAM**®

# GoSLAM M40

3D Laser Scanning Mobile Measurement System















Drone

Robotic Dog Extension Rod

**Head-Mounted** 



70m(Farthest) 1cm (Highest) 2mm (Highest)

Scan Range

Point Accuracy

Resolution



360°×59°

Scanning Speed

**FOV** 

### **Fixed Laser Probe**

It continues the fixed design of the laser, with a scanning range up to 70m (the farthest) and a point accuracy up to 1cm.



#### Real-Time Color, **Accurate Presentation**

The built-in high-definition color image sensor can scan and present true color point cloud data in real time. It can also be matched with a 8K panoramic color module, so that the delicate and realistic data is as what you see it with your own eyes.



### **Open Design**

Open design, supports external power supply and Ethernet port output, and can provide GoSLAM SDK protocol.







### Built-in RTK, **Precise Positioning**

The built-in high-precision RTK makes map construction, geographic surveying and engineering surveying more convenient.



#### **Real-time Color Point Cloud**

During scanning, the color point cloud data can be browsed in real time through the APP and it can be directly exported without processing.



### **High Protection**

It has a high level of protection against dust and water which makes



#### Super Weather Resistance

It has super weather resistance and can operate in an



#### Support Cross-Platform, **Easy To Operate**

Regardless of Android or iOS system, what we need is only a mobile phone to control scanning and we can preview the point cloud and data results in real time. It also supports dual high-precision post processing modes either in device or on desktop software to meet the accuracy demands from different users











### **Industry Applications**


Our products are being used in more than 10 industries with more than hundred types of scanning scenarios, mainly being used in forestry, mining, material volume measurement, tunnels, geographic information, bridges, slopes, and real estate survey etc.

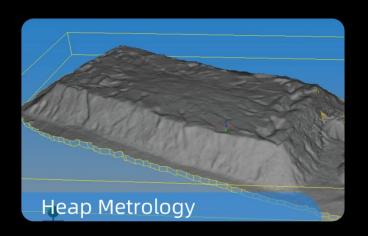





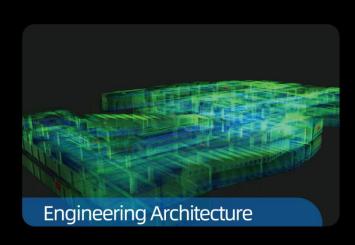

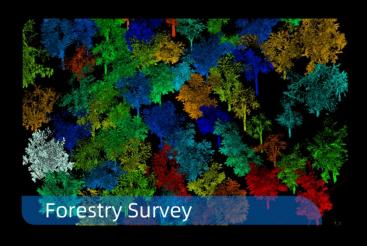





# **Supporting Accessories (Optional)**

Whether it is being used with handheld, head-mounted, extension rod, robotic dog and other ways, it can be easily handled and greatly expanded into Wide range of application scenarios.


















## **GoSLAM Manager APP**

The GoSLAM mobile APP can be used to control the scanner, view status of device and scanning on its interface, display point cloud data in real time, and give commands to process data locally. It breaks the physical limitation and offers a brand new scanning method.



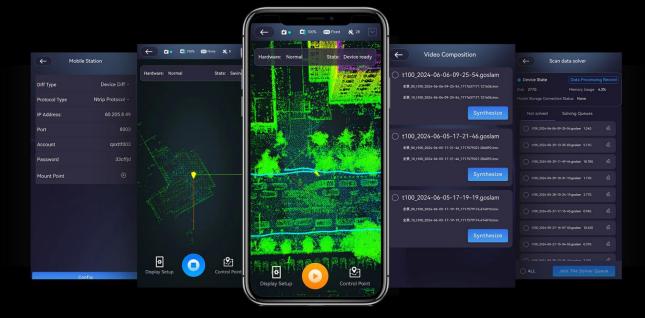



## **GoSLAM Mapping Master Standard**

Desktop processing software, users can choose the device host and desktop software processing mode based on their actual projects. It helps to improve overall working efficiency and meet various demands.



## Multiple Resolution Modes In Different Scenes

Support to process data in different precision and scanning modes based on different scanning scenes and requirements.



### **Various Scanning Methods**

Support using RTK in vehicle,backpack and handheld modes,support geodetic coordinates output and various processing modes based on scanning scenes.



### **Anchor Point Processing**

Processing data using known coordinates to perform high-precision correction, ensuring high-precision data can be obtained in handheld mode and it can be used in all scanning scenes.



## Panoramic Video For Colorization

Support panoramic video synthesis without the need using third-party software to colorize point cloud. One-stop colorization using panoramic video.



#### **Batch Data Processing**

Support data listed in queue, multi batch data processing, no staff required.




### **GoSLAM LidarWorks**


GoSLAM LidarWorks point cloud processing software is a powerful point cloud editing and application software. It supports basic functions such as massive point cloud browsing, cropping, noise reduction, smoothing, coordinate conversion and stitching. At the same time, it also supports mesh encapsulation and optimization, linkage between panoramic pictures and point cloud as well as a variety of industry application modules including forestry module, sand boat measurement module, pipeline measurement module, pile measurement module and mining module. When processing GoSLAM scanned data, you can also enjoy convenient operations such as automatic recognition of supporting files.



Cropping




Denoising




Coordinate Conversion




360 Panoramic Pictures Linkage




Pile Measuring Module




Forestry Module



Sand Boat Measuring Module



Pipeline Measurement Module



Mining Module

# **Product Parameter**

### M40

Laser Class	Class I(Eye-Safe)
Visual Slam	5 Million Pixels (Front)
Point Cloud Colorizin <sub>{</sub>	Internal Front Camera, Color Module
Color Module	8K 360 Degree Panoramic Camera (Optional)
Scanning Range	40m(10% Reflectivity) 70m(80% Reflectivity)
FOV	360°X59°
Scanning Speed	200,000 Points/Second
Internal Hard Dis	k 512G Hard Disk
External Third-Pa	orty RTK Support
Solution Method	Real Time, Device End, Desktop End
Scan Positioning	SLAM, Fusion Of Multi-Sensors
Accuracy	1cm(Highest)
Resolution	2mm(Highest)
Working Time	2.5h(There Is No Panoramic Color Module)
Working Temper	ature -35°C∼55°C
IP Level	66
Material	Aviation Grade Aluminum
Weight	900g (Excluding Battery)
Size	14.3×10.7×27.3cm







Address: 17th Floor, Zhubang 2000 Business Center, Chaoyang District, Beijing.

Telephone:+8610 87513716 Web:www.goslam.com

### M40 RTK

Laser Class	Class I(Eye-Safe)
Visual Slam	5 Million Pixels (Front)
Point Cloud Colorizing	Internal Front Camera, Color Module
Color Module	8K 360 Degree Panoramic Camera (Optional)
Scanning Range	40m(10% Reflectivity) 70m(80% Reflectivity)
FOV	360°X59°
Scanning Speed	200,000 Points/Second
Built In RTK Modu	ule Full Frequency, Single Beidou (Optional)
Built In RTK (RMS	) Plane 8mm+1ppm Elevation 15mm+1ppm
Internal Hard Dis	k 512G Hard Disk
External Third-Party	RTK Support
Solution Method	Real Time, Device Side, Desktop Side
Scan Positioning	SLAM, Fusion Of Multi-Sensors
Accuracy	1cm(Highest)
Resolution	2mm(Highest)
Working Time	2.5h(There Is No Panoramic Color Module)
Working Tempera	ature -35°C~55°C
IP Level	66
Material	Aviation Grade Aluminum
Weight	950g (Excluding Battery)
Size	14.3×10.7×27.3cm